



## Features

- 1. 350nits for indoor application.
- 2. Three Buttons for control: red green, yellow, and One Button for Emergency Stop.
- 3. Dust-proof, FULL IP65 waterproof, and shock-proof.
- 4. DC 12V power supply (DC24V, 9-36V Optional), support power-on boot, 7x24hours.
- 5. Fanless aluminum alloy shell, sturdy and durable with efficient heat dissipation system

## Specification

Screen	LCD Panel	Panel size	12.1"
		Resolution	1024*768 4:3
		Brightness (cd/m <sup>2</sup> )	350nits
		Contrast ratio	1000:1 (Typ.)
		View Angle	80°/80°/80°/80° (R/L/U/D)
	Touch	Touch Type	No Touch
		Touch Optional	Capacitive Touch / Resistive Touch
		Surface Hardness	G+G Glass, ≥3H or 7H
		Touch Interface	USB
		Working Life	≥50 million times

Environment	Temperature	Operating: -0 to 60°C, storage: -20 to 70°C
	Humidity	10%~90% @ 30°C, non-condensing

I/O Interfaces	1xHDMI, 4xButtons for Contro & Emergency Stop, 3x USB/RS232 for RFID
Power Supply	DC12V (DC 24v, 9-36v Optional)


Enclosure	Material	Fanless metal shell
	Color	Black or Silver
	VESA	75mm*75mm/100mm*100mm
	IP grade	FULL IP65 Waterproof
Dimension	Net weight	5kg
	Gross weight	6.25kg
	Product size	276*220*45mm
	Packing size	465x430x180mm

Packaging	1xMonitor, 1xDC Power Cable, 1xAdaptor, 4x RS232/USB Cables
OS	Support Windows 7/8/10, WES, Linux, Ubuntu, Debian, Android, etc.
Mountings	Embedded mounting screws
	Wall mounting brackets, Desk stand holder (optional)
Warranty	1-year free warranty

## Sizes Optional

7" 8"	10.1" 10.4"	12.1"	13.3"	15"   15.6"	17" 17.3"	19" 19" wide	21.5" 23.6" 24"
1024*600 1024*768	1280*800 1024*768	1024*768 1280*800	1920*1080	1024*768 /1920*1080	1280*1024	1280*1024 1440*900	1920*1080
16:9 4:3	16:10 4:3	4:3 16:10	16:9	4:3   16:9	4:3	4:3	16:9

## Drawing

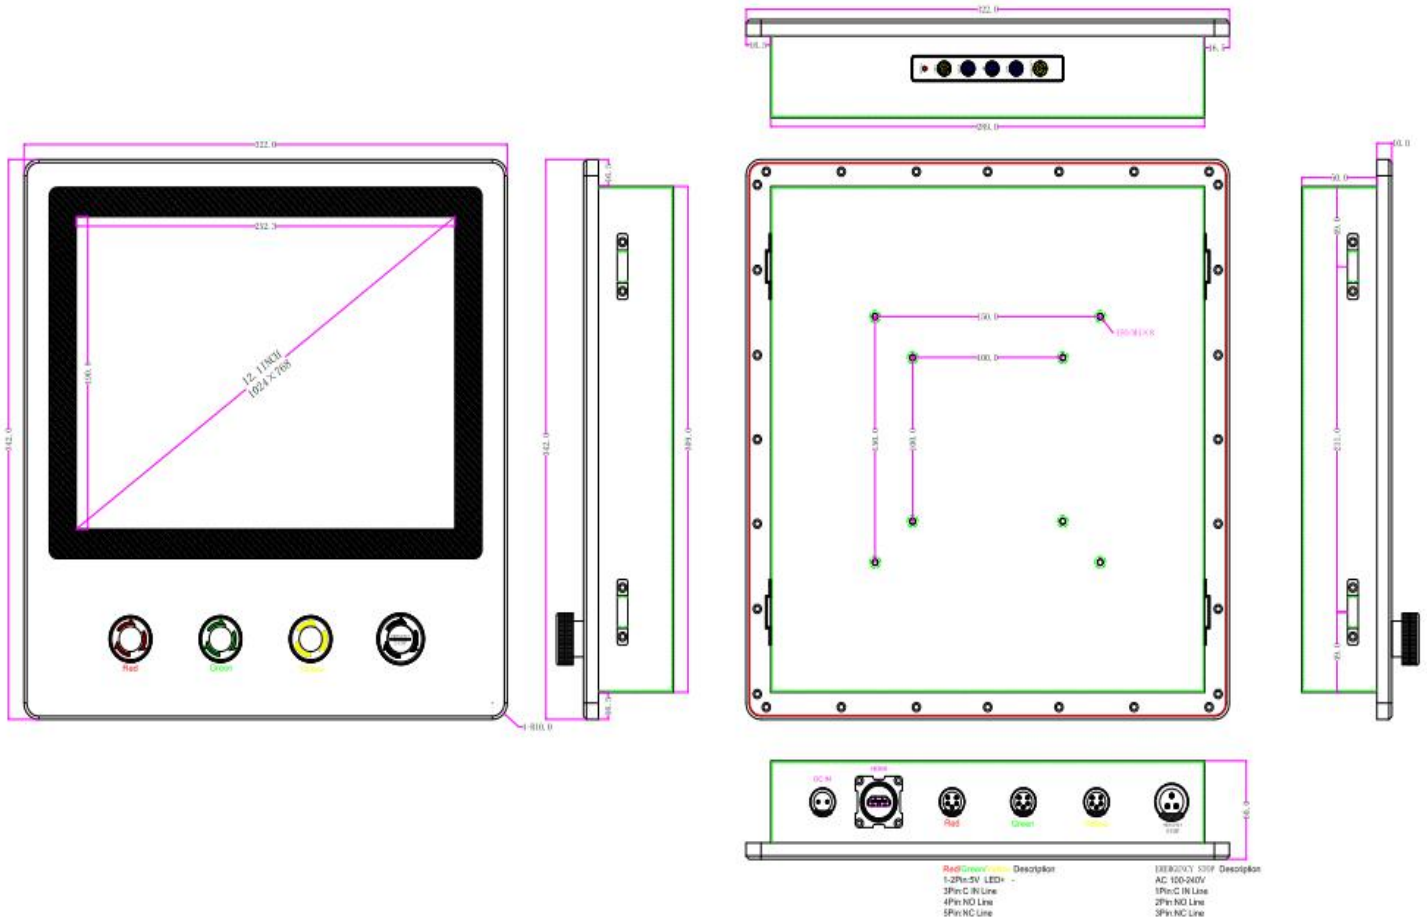

## Accessories

- 1x Monitor
- 1x Emergency Stop
- 3x Red/Green/Yellow
- 1x HDMI
- 1x Power cable
- 1x Adaptor
- 2x Screws