



Features

- 1. NEMA4/IP65 **waterproof and dustproof design**, all interfaces with CNLINKO connect
- 2. SUS304 **stainless steel enclosure**, more resistant to corrosion, shock and vibration
- 3. Adopting **EETI solution** + industrial-grade resistive touch, or no touch, high performance
- 4. DC 12V power supply (DC24V, 9-36V Optional), support power-on boot, 7x24hours
- 5. **1000nits brightness** for outdoor application, 400nits optional for indoor

Specification

Screen	LCD Panel	Panel size	15"
		Resolution	1024*768 4:3
		Brightness (cd/m ²)	1000nits (350nits Optional for Outdoor)
		Contrast ratio	1000:1 (Typ.)
		View Angle	85°/85°/80°/80° (R/L/U/D)
	Touch	Surface Treatment	Anti-glare Glass (Optional)
		Light Sensor	for Auto-dimming (Optional)
		Touch Type	No Touch
		Touch Optional	Resistive / Capacitive Touch
		Surface Hardness	ITO Glass, ≥3H or 7H
Touch Interface	USB		
Working Life	≥50 million times		


Environment	Temperature	Operating: -20 to 70°C, storage: -20 to 70°C
	Humidity	10%~90% @ 30°C, non-condensing

I/O Interfaces	1xVGA, 1xBNC, (DVI, HDMI Optional), 1xDC12V, 1xUSB
Power Supply	DC12V (DC 24v, 9-36v Optional)

Enclosure	Material	Stainless Steel
	Color	Stainless Steel or Black Coating
	VESA	100x100mm/100x200mm
	IP grade	FULL IP65 Waterproof
Dimension	Net weight	7kg
	Gross weight	8.5kg
	Product size	364.7*289*58mm
	Packing size	490m*400m*180mm

Packaging	1xMonitor, 1xDC Power Cable, 1xAdaptor, 1xUSB Cable, 1xVGA cable, 1xBNC Cable
OS	Support Windows 7/8/10, WES, Linux, Ubuntu, Debian, Android, etc.
Mountings	Embedded mounting screws
	Wall mounting brackets, Desk stand holder (optional)
Warranty	1-year free warranty

Drawing

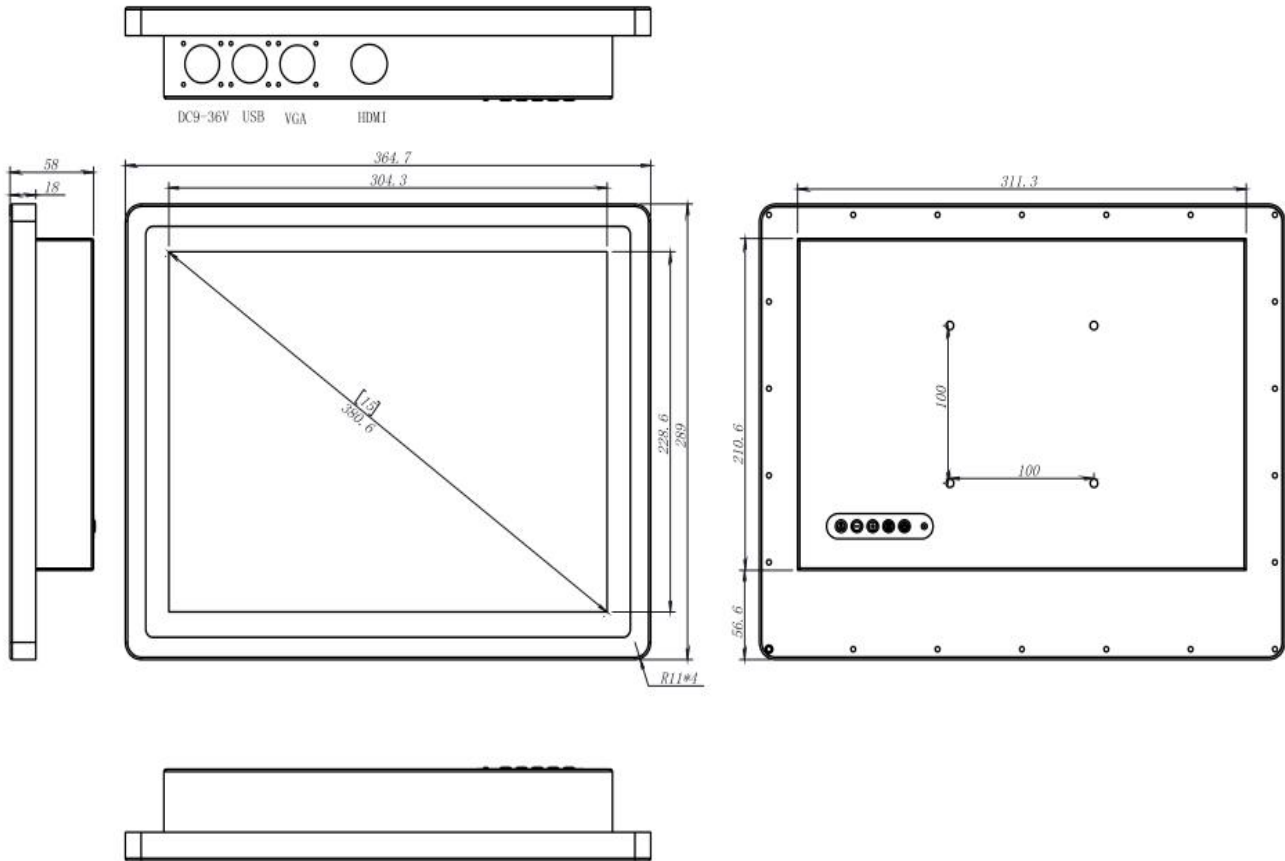

Sizes

8"	10.1"	12.1"	13.3"	15"	15.6	17"	21.5"
1024*768	1280*800	1024*768	1920*1080	1024*768	1920*1080	1280*1024	1920*1080
4:3	16:10	4:3	16:9	4:3	16:9	4:3	16:9

Accessories

- 1x Monitor
- 1x Power adapter
- 1x Power cord
- 1x All Waterproof Cables