



Features

- 1. 350nits for indoor application.
- 2. Adopting **EETI solution, capacitive touch**, industrial-grade, high-performance.
- 3. Dust-proof, front IP65 waterproof, and shock-proof.
- 4. DC 12V power supply (DC24V, 9-36V Optional), support power-on boot, 7x24hours.
- 5. Fanless aluminum alloy shell, sturdy and durable with efficient heat dissipation system

Specification

Screen	LCD Panel	Panel size	15.6"
		Resolution	1920*1080 16:9
		Brightness (cd/m ²)	350nits
		Contrast ratio	1000:1 (Typ.)
		View Angle	80°/80°/80°/80° (R/L/U/D)
	Touch	Touch Type	10 points Capacitive Touch
		Touch Optional	5 wires Resistive Touch
		Surface Hardness	G+G Glass, ≥6H
		Touch Interface	USB
		Working Life	≥50 million times

Environment	Temperature	Operating: -10 to 60°C, storage: -20 to 70°C
	Humidity	10%~90% @ 30°C, non-condensing

I/O Interfaces	1xVGA, 1xHDMI, 1xUSB, 1xDC (1xDVI Optional)
Power Supply	DC12V (DC 24v, 9-36v Optional)


Enclosure	Material	Fanless metal shell
	Color	Black
	VESA	75mm*75mm/100mm*100mm
	IP grade	Front IP65 Waterproof
Dimension	Net weight	5kg
	Gross weight	6kg
	Product size	410x192x50mm
	Packing size	500x435x160mm

Packaging	1xMonitor, 1xDC Power Cable, 1xAdaptor, 1xUSB Cable, 1xHDMI cable
OS	Support Windows 7/8/10, WES, Linux, Ubuntu, Debian, Android, etc.
Mountings	Embedded mounting screws
	Wall mounting brackets, Desk stand holder (optional)
Warranty	1-year free warranty

Sizes Optional

7" 8"	10.1" 10.4"	12.1"	13.3"	15" 15.6"	17" 17.3"	19" 19" wide	21.5" 23.6" 24"
1024*600 1024*768	1280*800 1024*768	1024*768 1280*800	1920*1080	1024*768 /1920*1080	1280*1024	1280*1024 1440*900	1920*1080
16:9 4:3	16:10 4:3	4:3 16:10	16:9	4:3 16:9	4:3	4:3	16:9

Drawing

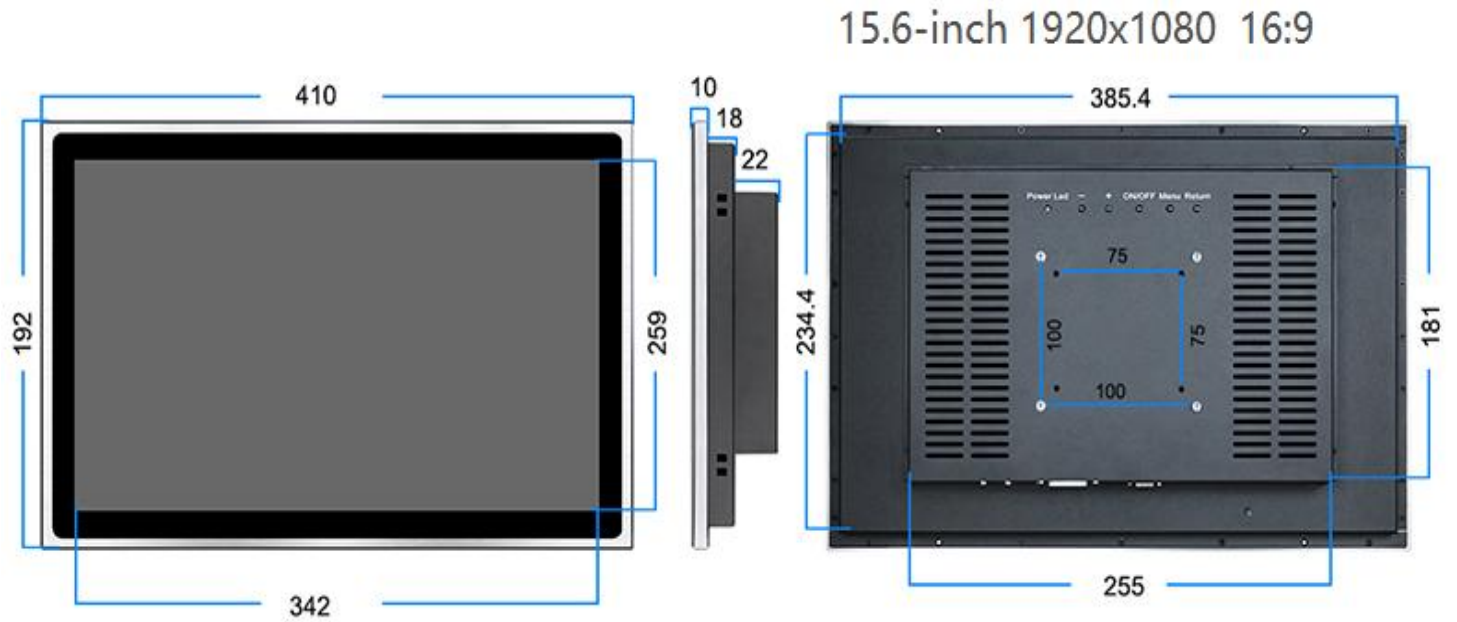

Accessories

- 1x Monitor
- 1x USB
- 1x HDMI
- 1x Power cable
- 1x Adaptor
- 2x Screws