



## Features

- 1. Embedded outdoor KIOSK design. (rubber ring with drainage channels Optional)
- 2. Adopt multi-points PCAP touch, high sensitive and fast-response, 6H Glass for vandalpro
- 3. 1000 nits, sunlight readable, with light sensor for auto dimming optional.
- 4. Anti-glare to reduce the shadow under the sun.
- 5. Wide temperature range: operating: -20 to 70°C, storage: -30 to 80°C.

## Specification

Screen	LCD Panel	Panel size	5.7"
		Resolution	640*480 4:3
		Brightness (cd/m <sup>2</sup> )	1000nits, sunlight-readbale
		Contrast ratio	800:1 (Typ.)
		View Angle	80°/80°/70°/70° (R/L/U/D)
		Surface Treatment	/
	Touch	Light Sensor	Auto-dimming for screen brightness Optional
		Touch Type	5 wires Resistive Touch
		Touch Optional	10 points Capacitive Touch or No Touch
		Surface Hardness	≥3H, or G+G, ≥7H
Touch Interface		USB	
Working Life	≥50 million times		

Environment	Temperature	Operating: -20°C to 70°C, storage: -30°C to 80°C
	Humidity	10%~90% @ 30°C, non-condensing


I/O Interfaces	1xHDMI, 1xDC12V, 1xUSB (1xVGA optional)
Power Supply	DC12V (DC 24v, 9-36v Optional)

Enclosure	Material	Front Aluminum Alloy + Back High Strength Cold Rolled Steel Me
	Color	Black
	VESA	75x75mm
	IP grade	Front IP65 Waterproof
	Back design	A rubber ring with drainage channels (Optional)

Dimension	Net weight	1kg
	Gross weight	2kg
	Product size	162x133.2x34.5mm
	Packing size	280*260*120mm

Packaging	1xMonitor, 1xDC Power Cable, 1xAdaptor, 1xUSB Cable, 1xHDMI/VGA
OS	Support Windows 7/8/10, WES, Linux, Ubuntu, Debian, Android, etc.
Mountings	Embedded mounting screws
	Wall mounting brackets, Desk stand holder (optional)
Warranty	1-year free warranty

## Drawing

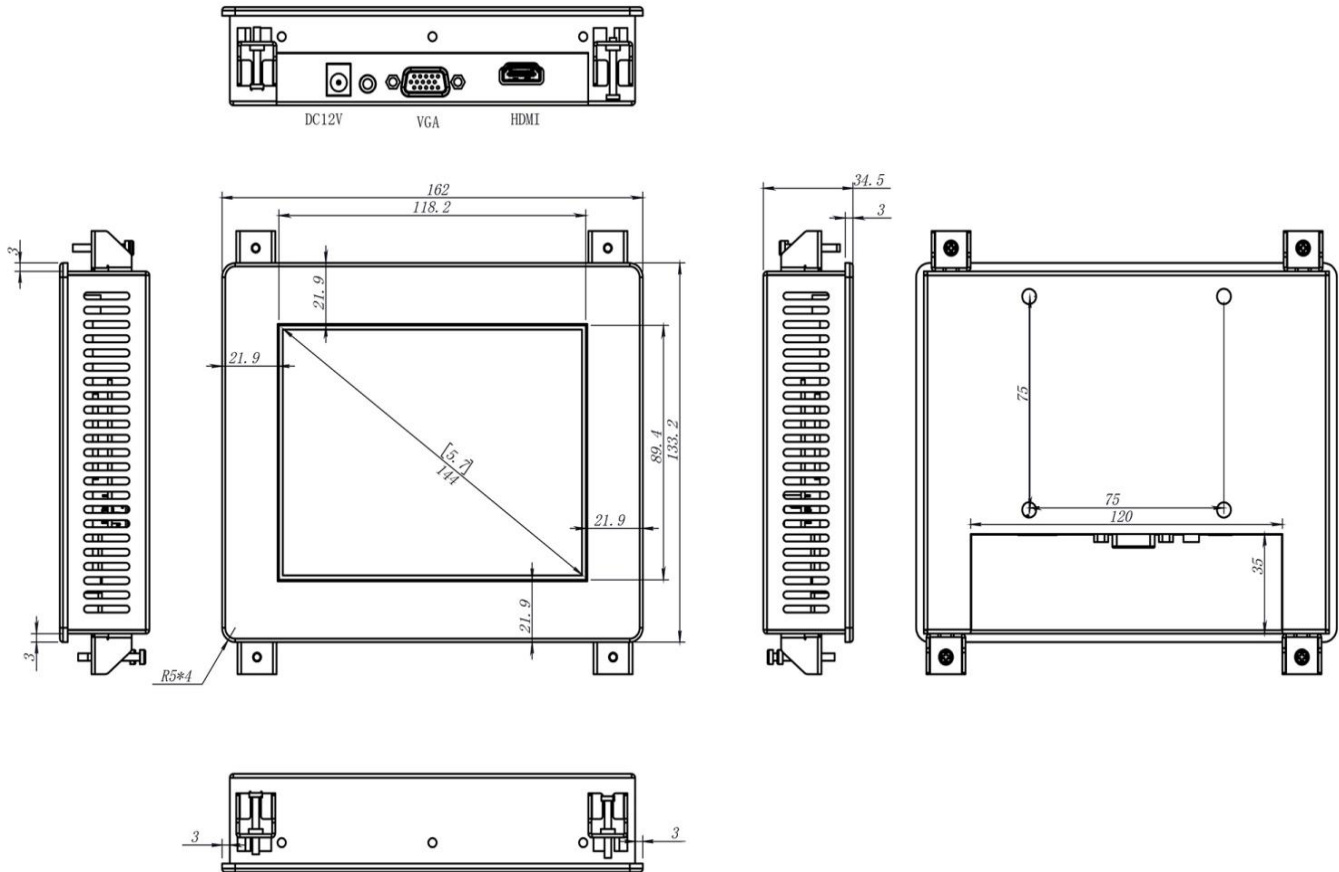

## Sizes

7" 8"	10.1" 10.4"	11.6"	12.1"	15"   15.6"	17" 17.3"	19" 19" wide	21.5"
1024*600 1024*768	1280*800 1024*768	1920*1080	1024*768 1280*800	1024*768 /1920*1080	1280*1024	1280*1024 1440*900	1920*1080
16:9 4:3	16:10 4:3	16:9	4:3 16:10	4:3   16:9	4:3	4:3	16:9

## Accessories

- 1x Monitor
- 1x Power adapter
- 1x Power cord
- 1x USB cable
- 1x HDMI cable
- 4x Screws for embedded mounting