



## Features

- 1. Embedded outdoor KIOSK design. (Rack Mounting Method with Screw Holes)
- 2. Adopt multi-points PCAP touch, or no Touch, 7H Glass for vandalproof.
- 3. 1000 nits, sunlight readable, with light sensor for auto dimming.
- 4. Anti-glare to reduce the shadow under the sun.
- 5. Wide temperature range: operating: -20 to 70°C, storage: -30 to 80°C.

## Specification

Screen	LCD Panel	Panel size	21.5"
		Resolution	1920*1080 16:9
		Brightness (cd/m <sup>2</sup> )	1000nits, sunlight-readbale
		Contrast ratio	1000:1 (Typ.)
		View Angle	80°/80°/80°/80° (R/L/U/D)
		Surface Treatment	Anti-glare / AF /AR Glass
	Touch	Light Sensor	Auto-dimming or Dimmer Knob
		Touch Type	No Touch
		Touch Optional	Resistive Touch/ Capacitive Touch
		Surface Hardness	G+G, ≥7H; or ≥3H
		Touch Interface	USB
		Working Life	≥50 million times
		Glass Treatment	Optical Bonding Optional
Brightness (cd/m <sup>2</sup> )	1500nits Optional		

Environment	Temperature	Operating: -20°C to 70°C, storage: -30°C to 80°C
	Humidity	10%~90% @ 30°C, non-condensing


I/O Interfaces	1xSDI In, 1xSDI Out, 1xHDMI, 1xDC12V
Power Supply	DC12V (DC 24v, 9-36v Optional)

Enclosure	Material	Aluminum Alloy
	Color	Black
	VESA	75x75mm/100x100mm
	IP grade	Front IP65 Waterproof
	Back design	A rubber ring with drainage channels (Optional)

Dimension	Net weight	6kg
	Gross weight	7.2kg
	Product size	546.1*420*46mm
	Packing size	650*500*170mm

Packaging	1xMonitor, 1xDC Power Cable, 1xAdaptor, 1xUSB Cable, 1xHDMI/VGA
OS	Support Windows 7/8/10, WES, Linux, Ubuntu, Debian, Android, etc.
Mountings	Embedded mounting screws
	Wall mounting brackets, Desk stand holder (optional)
Warranty	1-year free warranty

**Drawing**

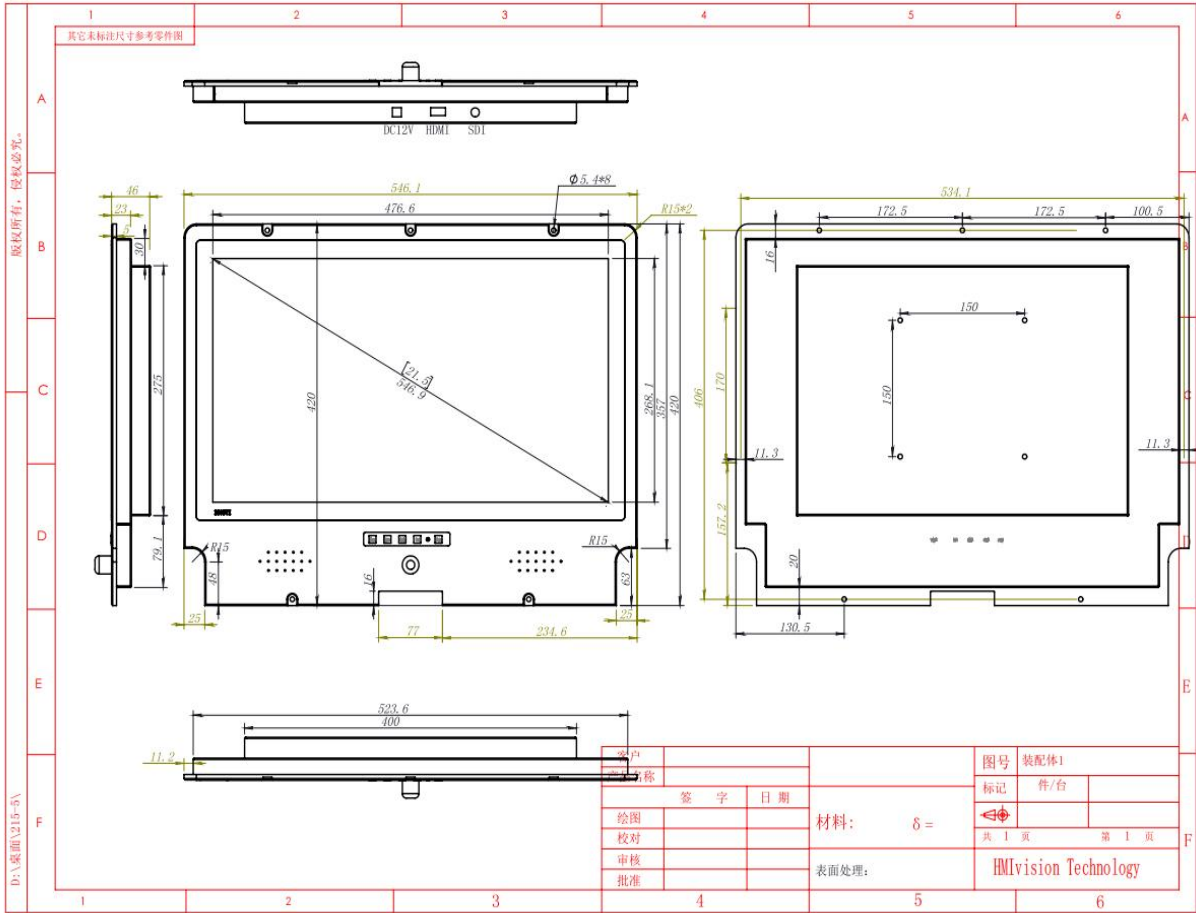

**Sizes**

7"/8"	10.1"	12.1"	13.3"	15"	15.6"	17"	19"
024*600/1024*768	1280*800	1024*768	1920*1080	1024*768	1920*1080	1280*1024	1280*1024
4:3	16:10	4:3	16:9	4:3	16:9	4:3	4:3

**Accessories**

- 1x Monitor
- 1x Power adapter
- 1x Power cord
- 1x USB cable
- 1x HDMI cable
- 4x Screws for embedded mounting

