

To Be Your Reliable Partner

HV-N205

Contact: Irene Chen

Email: irene@hmivision.com

Mobile/WhatsApp/Wechat: +86-17359286537



Features

Ⅲ FC (€ viens

- 1. All aluminum alloy structure, no fan design
- 2. Support Intel Celeron J1900 Quad-core, 2.0Ghz, fanless
- 3. Support 6xUSB, 6xCOM, 2xLAN, 1xHDMI, 1xSIM Slot, 1xMic, 1xLine Out
- 4. Support Windows 7/8/10, WES, Linux, Ubuntu, Debian, etc.
- 5. High performance mainboard, 7x24 continuous operation

Specification

| MainboardCPUIntel Celeron J1900 Quad-core, 2.0Ghz, fanlessRAM4GB/8GBSSD32GB/64GB/128GB/256GB/512GBPower SupplyWorking voltageDC12VEnclosureMaterialAluminum AlloyColorBlackVESA mounting75x75mmIP grade/EnvironmentTemperatureOperating: -20°C to 50°CRelative humidity5%~95% @ 30° C, non-condensingDimensionNet weight1.6KGGross weight2.5KGProduct size186 * 150 * 66 mmPacking size280*250*80mmI/O InterfacesSupport Windows 7/8/10, WES, Linux, Ubuntu, 1xLine Out, 1xAudio 1x3-PIN Terminal DC, 1xDC12V, 1xOn/Off, 1xWIFI/BluetoothOther FunctionsPower-on boot, scheduled boot, wake-up on LAN, PXE boot, watchdog (level 0~255)OSSupport Windows 7/8/10, WES, Linux, Ubuntu, Debian, etc.MountingsWall mounting bracket Desk stand holder / Rail type (optional)Warranty1-year free warranty | • | | | |
|---|-----------------|---|--|--|
| SSD 32GB/64GB/128GB/256GB/512GB Power Supply Working voltage DC12V Enclosure Material Aluminum Alloy Color Black VESA mounting VESA mounting 75x75mm Prover Supply IP grade / Prover Supply Environment Temperature Operating: -20°C to 50°C Relative humidity 5%~95% @ 30° C, non-condensing Dimension Net weight 1.6KG Gross weight 2.5KG Product size 186 * 150 * 66 mm Packing size 280*250*80mm I/O Interfaces 6xUSB, 6xCOM, 2xLAN, 1xHDMI, 1xSIM Slot, 1xMic, 1xLine Out, 1xAudio I//O Interfaces 6xUSB, 6xCOM, 2xLAN, 1xHDMI, 1xSIM Slot, 1xMic, 1xLine Out, 1xAudio Ix3-PIN Terminal DC, 1xDC12V, 1xOn/Off, 1xWIFI/Bluetooth Nouting Other Functions Power-on boot, scheduled boot, wake-up on LAN, PXE boot, watchdog (level 0~255) OS Support Windows 7/8/10, WES, Linux, Ubuntu, Debian, etc. Mounting Wall mounting bracket Desk stand holder / Rail type (optional) Dimension | Mainboard | CPU | Intel Celeron J1900 Quad-core, 2.0Ghz, fanless | |
| Power Supply Working voltage DC12V Enclosure Material Aluminum Alloy Color Black VESA mounting 75x75mm 75x75mm IP grade / Environment Temperature Operating: -20°C to 50°C Relative humidity 5%~95% @ 30° C, non-condensing Dimension Net weight 1.6KG Gross weight 2.5KG Product size 186 * 150 * 66 mm Packing size 280*250*80mm IVO Interfaces 6xUSB, 6xCOM, 2xLAN, 1xHDMI, 1xSIM Slot, 1xMic, 1xLine Out, 1xAudio Ix3-PIN Terminal DC, 1xDC12V, 1xOn/Off, 1xWIFI/Bluetooth 1x3-PIN Terminal DC, 1xDC12V, 1xOn/Off, 1xWIFI/Bluetooth Other Functions Power-on boot, scheduled boot, wake-up on LAN, PXE boot, watchdog (level 0~255) OS Support Windows 7/8/10, WES, Linux, Ubuntu, Debian, etc. Mounting Wall mounting bracket Desk stand holder / Rail type (optional) Extended to the stand point of t | | RAM | 4GB/8GB | |
| Image: Solution of the stand standard standa | | SSD | 32GB/64GB/128GB/256GB/512GB | |
| Image: Solution of the stand standard standa | | | | |
| Enclosure Color Black VESA mounting 75x75mm IP grade / Environment Temperature Operating: -20°C to 50°C Relative humidity 5%-95% @ 30° C, non-condensing Dimension Net weight 1.6KG Gross weight 2.5KG Product size 186 * 150 * 66 mm Packing size 280*250*80mm I/O Interfaces 6xUSB, 6xCOM, 2xLAN, 1xHDMI, 1xSIM Slot, 1xMic, 1xLine Out, 1xAudio 1/O Interfaces 6xUSB, 6xCOM, 2xLAN, 1xHDMI, 1xSIM Slot, 1xMic, 1xLine Out, 1xAudio 1/O Interfaces 6xUSB, 6xCOM, 2xLAN, 1xHDMI, 1xSIM Slot, 1xMic, 1xLine Out, 1xAudio 1x3-PIN Terminal DC, 1xDC12V, 1xOn/Off, 1xWIFI/Bluetooth 1x3-PIN Terminal DC, 1xDC12V, 1xOn/Off, 1xWIFI/Bluetooth Other Functions Power-on boot, scheduled boot, wake-up on LAN, PXE boot, watchdog (level 0~255) OS Support Windows 7/8/10, WES, Linux, Ubuntu, Debian, etc. Mountings Wall mounting bracket Desk stand holder / Rail type (optional) | Power Supply | Working voltage | DC12V | |
| Enclosure Color Black VESA mounting 75x75mm IP grade / Environment Temperature Operating: -20°C to 50°C Relative humidity 5%-95% @ 30° C, non-condensing Dimension Net weight 1.6KG Gross weight 2.5KG Product size 186 * 150 * 66 mm Packing size 280*250*80mm I/O Interfaces 6xUSB, 6xCOM, 2xLAN, 1xHDMI, 1xSIM Slot, 1xMic, 1xLine Out, 1xAudio 1/O Interfaces 6xUSB, 6xCOM, 2xLAN, 1xHDMI, 1xSIM Slot, 1xMic, 1xLine Out, 1xAudio 1/O Interfaces 6xUSB, 6xCOM, 2xLAN, 1xHDMI, 1xSIM Slot, 1xMic, 1xLine Out, 1xAudio 1x3-PIN Terminal DC, 1xDC12V, 1xOn/Off, 1xWIFI/Bluetooth 1x3-PIN Terminal DC, 1xDC12V, 1xOn/Off, 1xWIFI/Bluetooth Other Functions Power-on boot, scheduled boot, wake-up on LAN, PXE boot, watchdog (level 0~255) OS Support Windows 7/8/10, WES, Linux, Ubuntu, Debian, etc. Mountings Wall mounting bracket Desk stand holder / Rail type (optional) | | | | |
| Enclosure VESA mounting 75x75mm IP grade / Environment Temperature Operating: -20°C to 50°C Relative humidity 5%~95% @ 30° C, non-condensing Dimension Net weight 1.6KG Gross weight 2.5KG Product size 186 * 150 * 66 mm Packing size 280*250*80mm I/O Interfaces 6xUSB, 6xCOM, 2xLAN, 1xHDMI, 1xSIM Slot, 1xMic, 1xLine Out, 1xAudio I/O Interfaces 6xUSB, 6xCOM, 2xLAN, 1xHDMI, 1xSIM Slot, 1xMic, 1xLine Out, 1xAudio Other Functions Power-on boot, scheduled boot, wake-up on LAN, PXE boot, watchdog (level 0~255) OS Support Windows 7/8/10, WES, Linux, Ubuntu, Debian, etc. Mountings Wall mounting bracket Desk stand holder / Rail type (optional) | Enclosure | Material | Aluminum Alloy | |
| VESA mounting 75x75mm IP grade / Environment Temperature Operating: -20°C to 50°C Relative humidity 5%~95% @ 30° C, non-condensing Dimension Net weight 1.6KG Gross weight 2.5KG Product size 186 * 150 * 66 mm Packing size 280*250*80mm I/O Interfaces 6xUSB, 6xCOM, 2xLAN, 1xHDMI, 1xSIM Slot, 1xMic, 1xLine Out, 1xAudio 1x3-PIN Terminal DC, 1xDC12V, 1xOn/Off, 1xWIFI/Bluetooth 1x3-PIN Terminal DC, 1xDC12V, 1xOn/Off, 1xWIFI/Bluetooth Other Functions Power-on boot, scheduled boot, wake-up on LAN, PXE boot, watchdog (level 0~255) OS Support Windows 7/8/10, WES, Linux, Ubuntu, Debian, etc. Mountings Wall mounting bracket Desk stand holder / Rail type (optional) | | Color | Black | |
| Environment Temperature Relative humidity Operating: -20°C to 50°C Relative humidity Dimension Net weight 1.6KG Gross weight 2.5KG Product size 186 * 150 * 66 mm Packing size 280*250*80mm I/O Interfaces 6xUSB, 6xCOM, 2xLAN, 1xHDMI, 1xSIM Slot, 1xMic, 1xLine Out, 1xAudio 1x3-PIN Terminal DC, 1xDC12V, 1xOn/Off, 1xWIFI/Bluetooth Other Functions Power-on boot, scheduled boot, wake-up on LAN, PXE boot, watchdog (level 0~255) OS Support Windows 7/8/10, WES, Linux, Ubuntu, Debian, etc. Mountings Wall mounting bracket Desk stand holder / Rail type (optional) | | VESA mounting | 75x75mm | |
| Environment Relative humidity 5%~95% @ 30° C, non-condensing Net weight 1.6KG Gross weight 2.5KG Product size 186 * 150 * 66 mm Packing size 280*250*80mm I/O Interfaces 6xUSB, 6xCOM, 2xLAN, 1xHDMI, 1xSIM Slot, 1xMic, 1xLine Out, 1xAudio 1/O Interfaces 6xUSB, 6xCOM, 2xLAN, 1xHDMI, 1xSIM Slot, 1xMic, 1xLine Out, 1xAudio 1x3-PIN Terminal DC, 1xDC12V, 1xOn/Off, 1xWIFI/Bluetooth 0ther Functions Other Functions Power-on boot, scheduled boot, wake-up on LAN, PXE boot, watchdog (level 0~255) OS Support Windows 7/8/10, WES, Linux, Ubuntu, Debian, etc. Mountings Wall mounting bracket Desk stand holder / Rail type (optional) Environal | | IP grade | / | |
| Environment Relative humidity 5%~95% @ 30° C, non-condensing Net weight 1.6KG Gross weight 2.5KG Product size 186 * 150 * 66 mm Packing size 280*250*80mm I/O Interfaces 6xUSB, 6xCOM, 2xLAN, 1xHDMI, 1xSIM Slot, 1xMic, 1xLine Out, 1xAudio 1/O Interfaces 6xUSB, 6xCOM, 2xLAN, 1xHDMI, 1xSIM Slot, 1xMic, 1xLine Out, 1xAudio 1x3-PIN Terminal DC, 1xDC12V, 1xOn/Off, 1xWIFI/Bluetooth 0ther Functions Other Functions Power-on boot, scheduled boot, wake-up on LAN, PXE boot, watchdog (level 0~255) OS Support Windows 7/8/10, WES, Linux, Ubuntu, Debian, etc. Mountings Wall mounting bracket Desk stand holder / Rail type (optional) Environal | | | | |
| Relative humidity 5%~95% @ 30° C, non-condensing Image: Dimension Net weight 1.6KG Gross weight 2.5KG Product size 186 * 150 * 66 mm Packing size 280*250*80mm I/O Interfaces 6xUSB, 6xCOM, 2xLAN, 1xHDMI, 1xSIM Slot, 1xMic, 1xLine Out, 1xAudio 1x3-PIN Terminal DC, 1xDC12V, 1xOn/Off, 1xWIFI/Bluetooth Other Functions Power-on boot, scheduled boot, wake-up on LAN, PXE boot, watchdog (level 0~255) OS Support Windows 7/8/10, WES, Linux, Ubuntu, Debian, etc. Mountings Wall mounting bracket Desk stand holder / Rail type (optional) | Environment | Temperature | Operating: -20°C to 50°C | |
| Dimension Gross weight 2.5KG Product size 186 * 150 * 66 mm Packing size 280*250*80mm I/O Interfaces 6xUSB, 6xCOM, 2xLAN, 1xHDMI, 1xSIM Slot, 1xMic, 1xLine Out, 1xAudio 1x3-PIN Terminal DC, 1xDC12V, 1xOn/Off, 1xWIFI/Bluetooth Other Functions Power-on boot, scheduled boot, wake-up on LAN, PXE boot, watchdog (level 0~255) OS Support Windows 7/8/10, WES, Linux, Ubuntu, Debian, etc. Mountings Wall mounting bracket Desk stand holder / Rail type (optional) | | Relative humidity | 5%~95% @ 30° C, non-condensing | |
| Dimension Gross weight 2.5KG Product size 186 * 150 * 66 mm Packing size 280*250*80mm I/O Interfaces 6xUSB, 6xCOM, 2xLAN, 1xHDMI, 1xSIM Slot, 1xMic, 1xLine Out, 1xAudio 1x3-PIN Terminal DC, 1xDC12V, 1xOn/Off, 1xWIFI/Bluetooth Other Functions Power-on boot, scheduled boot, wake-up on LAN, PXE boot, watchdog (level 0~255) OS Support Windows 7/8/10, WES, Linux, Ubuntu, Debian, etc. Mountings Wall mounting bracket Desk stand holder / Rail type (optional) | | | | |
| Dimension Product size 186 * 150 * 66 mm Packing size 280*250*80mm I/O Interfaces 6xUSB, 6xCOM, 2xLAN, 1xHDMI, 1xSIM Slot, 1xMic, 1xLine Out, 1xAudio 1x3-PIN Terminal DC, 1xDC12V, 1xOn/Off, 1xWIFI/Bluetooth Other Functions Power-on boot, scheduled boot, wake-up on LAN, PXE boot, watchdog (level 0~255) OS Support Windows 7/8/10, WES, Linux, Ubuntu, Debian, etc. Mountings Wall mounting bracket Desk stand holder / Rail type (optional) | Dimension | Net weight | 1.6KG | |
| Product size 186 * 150 * 66 mm Packing size 280*250*80mm I/O Interfaces 6xUSB, 6xCOM, 2xLAN, 1xHDMI, 1xSIM Slot, 1xMic, 1xLine Out, 1xAudio 1x3-PIN Terminal DC, 1xDC12V, 1xOn/Off, 1xWIFI/Bluetooth Other Functions Power-on boot, scheduled boot, wake-up on LAN, PXE boot, watchdog (level 0~255) OS Support Windows 7/8/10, WES, Linux, Ubuntu, Debian, etc. Mountings Wall mounting bracket Desk stand holder / Rail type (optional) | | Gross weight | 2.5KG | |
| I/O Interfaces 6xUSB, 6xCOM, 2xLAN, 1xHDMI, 1xSIM Slot, 1xMic, 1xLine Out, 1xAudio I/O Interfaces 6xUSB, 6xCOM, 2xLAN, 1xHDMI, 1xSIM Slot, 1xMic, 1xLine Out, 1xAudio Other Functions Power-on boot, scheduled boot, wake-up on LAN, PXE boot, watchdog (level 0~255) OS Support Windows 7/8/10, WES, Linux, Ubuntu, Debian, etc. Mountings Wall mounting bracket Desk stand holder / Rail type (optional) | | Product size | 186 * 150 * 66 mm | |
| I/O Interfaces 1x3-PIN Terminal DC, 1xDC12V, 1xOn/Off, 1xWIFI/Bluetooth Other Functions Power-on boot, scheduled boot, wake-up on LAN, PXE boot, watchdog (level 0~255) OS Support Windows 7/8/10, WES, Linux, Ubuntu, Debian, etc. Mountings Wall mounting bracket Desk stand holder / Rail type (optional) | | Packing size | 280*250*80mm | |
| I/O Interfaces 1x3-PIN Terminal DC, 1xDC12V, 1xOn/Off, 1xWIFI/Bluetooth Other Functions Power-on boot, scheduled boot, wake-up on LAN, PXE boot, watchdog (level 0~255) OS Support Windows 7/8/10, WES, Linux, Ubuntu, Debian, etc. Mountings Wall mounting bracket Desk stand holder / Rail type (optional) | | | | |
| 1x3-PIN Terminal DC, 1xDC12V, 1xOn/Off, 1xWIFI/Bluetooth Other Functions Power-on boot, scheduled boot, wake-up on LAN, PXE boot, watchdog (level 0~255) OS Support Windows 7/8/10, WES, Linux, Ubuntu, Debian, etc. Mountings Wall mounting bracket Desk stand holder / Rail type (optional) | I/O Interfaces | 6xUSB, 6xCOM, 2xLAN, 1xHDMI, 1xSIM Slot, 1xMic, 1xLine Out, 1xAudio | | |
| OS Support Windows 7/8/10, WES, Linux, Ubuntu, Debian, etc. Mountings Wall mounting bracket Desk stand holder / Rail type (optional) | | 1x3-PIN Terminal DC, 1xDC12V, 1xOn/Off, 1xWIFI/Bluetooth | | |
| OS Support Windows 7/8/10, WES, Linux, Ubuntu, Debian, etc. Mountings Wall mounting bracket Desk stand holder / Rail type (optional) | | | | |
| Mountings Wall mounting bracket Desk stand holder / Rail type (optional) | Other Functions | Power-on boot, scheduled boot, wake-up on LAN, PXE boot, watchdog (level 0~255) | | |
| Mountings Wall mounting bracket Desk stand holder / Rail type (optional) | | | | |
| Desk stand holder / Rail type (optional) | OS | Support Windows 7/8/10, WES, Linux, Ubuntu, Debian, etc. | | |
| Desk stand holder / Rail type (optional) | | | | |
| Desk stand holder / Rail type (optional) | Mountings | Wall mounting bracket | | |
| Warranty 1-year free warranty | | Desk stand holder / Rail type (optional) | | |
| Warranty 1-year free warranty | | | | |
| | Warranty | 1-year free warranty | , | |
| | | • | | |

WWW.HMIvision.COM

To offer you a Tailored Proposal for SCREEN display



To Be Your Reliable Partner


HV-N205

Contact: Irene Chen

Email: irene@hmivision.com

Mobile/WhatsApp/Wechat: +86-17359286537

Drawing

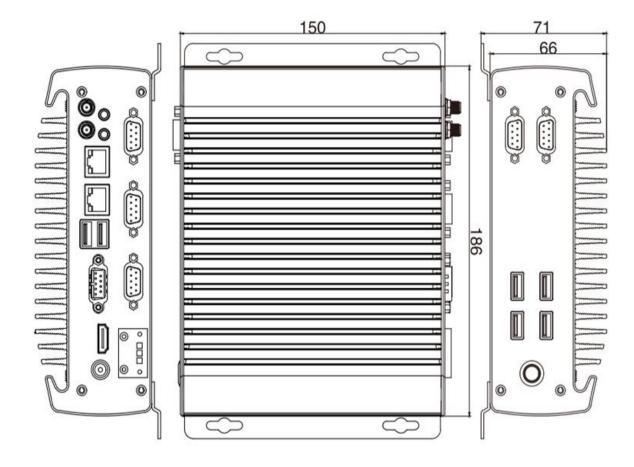

Accessories

1x BOX PC 1x Wall Charger 1x Adaptor

Configuration

CPU available Intel Celeron J1900 Quad-core 2.0Ghz, Fanless

WWW.HMIvision.COM

To offer you a Tailored Proposal for SCREEN display